




Product

- NC162CP** non concussive basin mounted taps timed flow 15 seconds (pairs)
NC162CP(S) non concussive basin mounted taps timed flow 15 seconds (single)
NC162CP5 non concussive basin mounted taps timed flow 15 seconds (pairs) c/w 5ltr per minute flow regulator
NC162CPS5 non concussive basin mounted taps timed flow 15 seconds (single) c/w 5ltr per minute flow regulator
NC163CP non concussive basin mounted taps timed flow 3 seconds (pairs)

Technical Specification

Max Inlet Pressure	6 Bar
Min Inlet Pressure	1 Bar
Max Inlet Temperature	65°C
NC162 Timed flow (standard)	15 ±5 seconds at 3 bar
NC163 Timed flow (standard)	3 ±3 seconds at 3 bar

Drawing

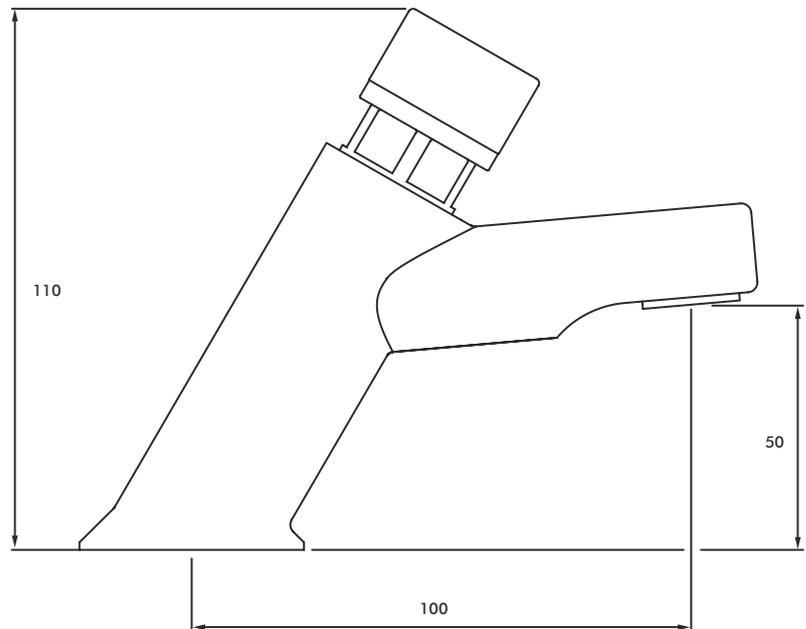

Additional Information

Simple operation

Closes automatically

Water economy

Non concussive operation

5ltr flow regulator option available

WEPLS accredited flow regulator

Interchangeable red/blue indices

