Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
150 L	STELFLOW	DirectUnvented	Stainless	STELFLOW	DIRECT

Product Specification

Actual capacity (Ltr)	150	**Thermal insulation**	DENSE PU FOAM
Unit weight empty (kg)	33	**Cylinder material**	LDX 2101
Unit weight full (kg)	183	**Outer casing**	COATED MILD STEEL
No immersions	2	**Foam thickness** (mm)	0
Immersion spec kw 230v	3KW@230V	**Dual stat label** (C)	Direct
Max mains water pressure (Bar)	10	**Safety temp** (C)	90
Operating pressure t x0026 p (Bar)	7	**Warranty terms** (Year)	25Y
Tested to standard	BS EN 50440:2015	**Heat loss** (kWh_24h)	1.26

Dimensions
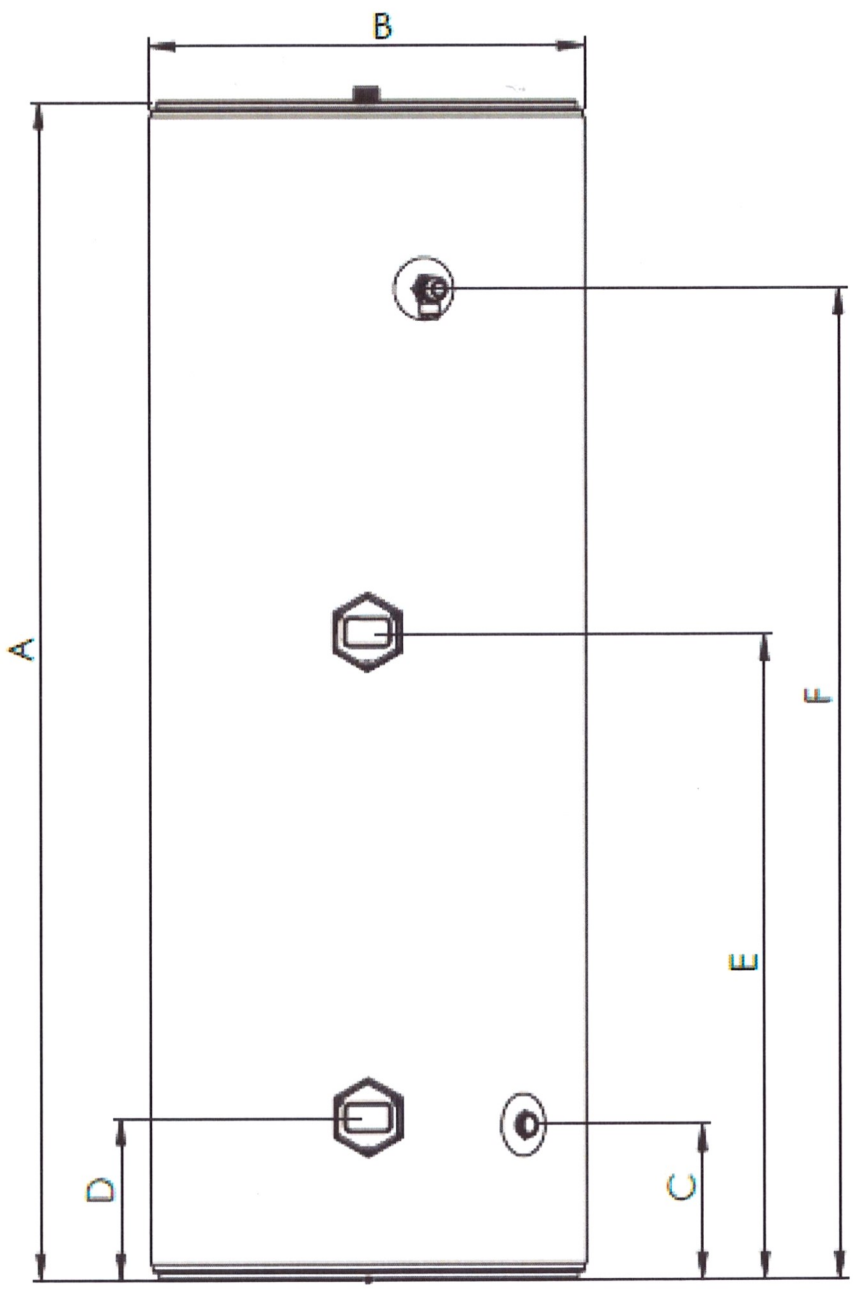
A (mm)	1108
B (mm)	550
C (mm)	195
D (mm)	205
E (mm)	612
F (mm)	873