TotalHome®

PROGRAMMABLE THERMOSTAT

User Guide

TTHWP, TTHWFP (Room Thermostat / Relay Box)

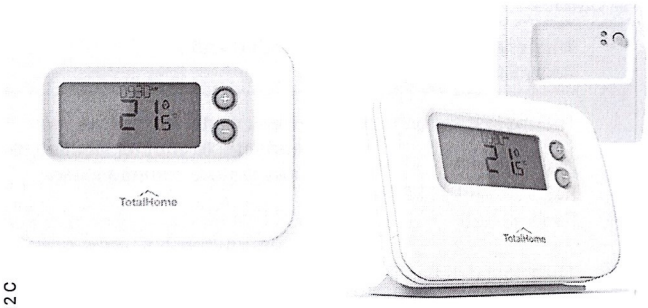

32341899-012 C

1 Screen and button overview

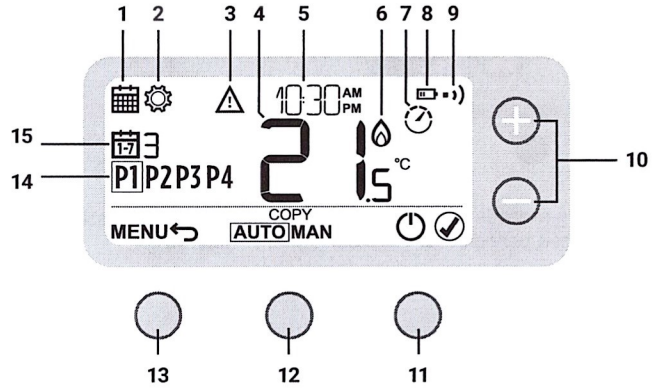

1 Programming Menu
2 Settings Menu
3 Alert
4 Room Temperature
5 Current time
6 Heat demand
7 Optimisation
8 Low battery
9 Wireless signal (TTHWFP only)
10 Temperature adjust buttons
11 Standby / Confirm button
12 Auto mode / Manual mode / Copy button
13 Menu / Back button
14 Schedule period
15 Day (1 = MON, 2 = TUE, ... 7 = SUN)

2 Programming the Schedule

Default Schedule

	P1	P2	P3	P4
🕒	6:30	8:00	18:00	22:30
🌡	21°C	16°C	21°C	16°C

Adjusting the Schedule

①



Press MENU

②



Select PROG then confirm

③



Select day then confirm

④



Select period then confirm

⑤



Adjust time then confirm

⑥



Adjust temperature then confirm

Copy Day

①



Select day then COPY

②



Select "TO" day then confirm

1 = MON
2 = TUE
3 = WED
4 = THU
5 = FRI
6 = SAT
7 = SUN

3 Device Modes

"AUTO"



Programmed schedule is followed

"MAN"



Only set temperature is followed

"OFF"



Heating is OFF

4 Temperature Override

"AUTO"



Temporary override until next programmed period

"MAN"



Permanent override until manually changed

5 Date and Time

①



Press MENU

②



Select SETTINGS then confirm

⑤



Set MONTH (1-12) then confirm

⑥



Repeat steps to set DAY, HOUR and MINUTE

③



Select YEAR then confirm

④



Set YEAR then confirm

6 Troubleshooting

🔋	10% battery power
⚠+🔋	Battery critical low
⚠+ – –	Faulty sensor
Wireless Programmable Thermostat and Relay Box only (TTHWFP)	
Thermostat is flashing ⚠+ and Relay Box LED is flashing RED	Wireless signal lost - Move the Thermostat to another location to try and restore communication.
Thermostat is flashing ⚠+ and Relay Box LED is off.	Check Relay Box has power by pressing the button to switch boiler on. If Relay Box has power then no wireless binding data stored - contact your installer.
Relay Box LED is flashing RED slowly.	Relay Box is in binding mode - will time out of this mode after 3 minutes.

FROM
resideo
www.resideo.com

Technical Support
01183 152 114

© 2024 Resideo Technologies, Inc. All rights reserved.
This product is manufactured by Resideo Technologies, Inc. and its affiliates.