

Important information for First-Call Operatives and Gas Installers encountering GASM8 Hob-Pro for the first time.

Please ensure this information is kept safe, and available together with the Hob manufacturers installation manual.

GASM8 Hob-Pro is manufactured using semi-pliable Corrugated Stainless-Steel Tube (CSST), manufactured to BS EN 15266, and is designed specifically to make the final connection for a fixed and installed (within a worktop) Domestic Gas Cooking Hob / Hotplate.

Hob-Pro has been tested and approved by BSI, and holds Kitemark Licence Number: KM 731516.


Hob-Pro is supplied in Male and Female versions and come in fixed 500mm, 750mm and 1000mm lengths. Hob-Pro must not be used to connect freestanding/movable gas appliances.

Hob-Pro shall be installed by a Gas Safe Registered Installer, in strict compliance with the supplied Installation Instructions, the Gas Safety (Installation and Use) Regulations, current versions of BS 6172, BS 6891 and all local regulations.

Please read carefully and note the following clauses, which are stated in BS6172.

- **11.1.3** A built-in gas hob or oven shall be connected to the termination point by means of rigid pipework or, unless stated otherwise in the manufacturer's instructions, by: a flexible connector and self-sealing plug-in device conforming to BS 669-1 or BS EN 14800 (see **11.4**); or pliable corrugated stainless steel tube complying with BS 7838 or BS EN 15266.
- **11.1.4** Before pliable corrugated stainless steel tube is installed as the final connection to the built-in gas hob or oven, the manufacturer's installation instructions for the hob and where appropriate, any oven located below the hob, shall be consulted to ensure the appliance(s) does not create an environmental temperature in excess of the temperatures specified in **11.1.3**.
- **11.1.7** Where rigid pipework, or pliable corrugated stainless steel tubing conforming to BS EN 15266 or BS 7838, is used, an isolation valve with means of disconnection between the isolation valve and the appliance shall be provided.

Images for the Female and Male versions of Hob-Pro

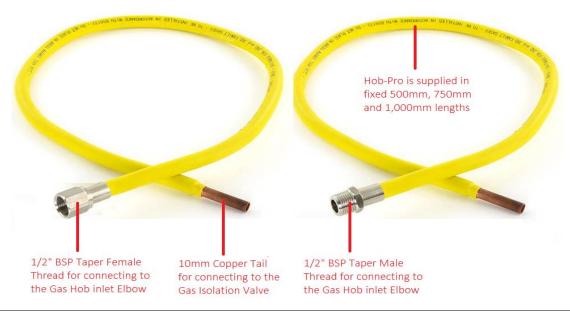

Product Code	Description
24916	10mm x 1/2"BSPT Female x 500mm Gas Hob Connector
24917	10mm x 1/2"BSPT Female x 750mm Gas Hob Connector
24918	10mm x 1/2"BSPT Female x 1000mm Gas Hob Connector
24919	10mm x 1/2"BSPT Male x 500mm Gas Hob Connector
24920	10mm x 1/2"BSPT Male x 750mm Gas Hob Connector
24921	10mm x 1/2"BSPT Male x 1000mm Gas Hob Connector